



Get with our new industrial wall

Easy mounting

Mounting possible by only one person.

High stability

- Panel frame 25x15 mm
- Wire 3,5 mm
- U-profiled uprights
- Stabilisators
- Lengths and heights > 3 m
- Upright made of only one piece till 6 m
- Door braces always included in the door standard frame.

This system is self-standing and can be modified according to your requirements.

Its easy mounting allows a comfortable and secured use.



* dependent on configuration.
To know which dimensions are concerned,
please contact us.



A lot of solutions adapted to your environment




*Made of panels.
When you mix different heights, lengths and types of panels, you can choose the « design » of your wall.*

A lot of accessories, of possibilities that insure the security of people, of an area, of your goods and allows the optimization of your working and storage environment.



You want colours? We offer a large range

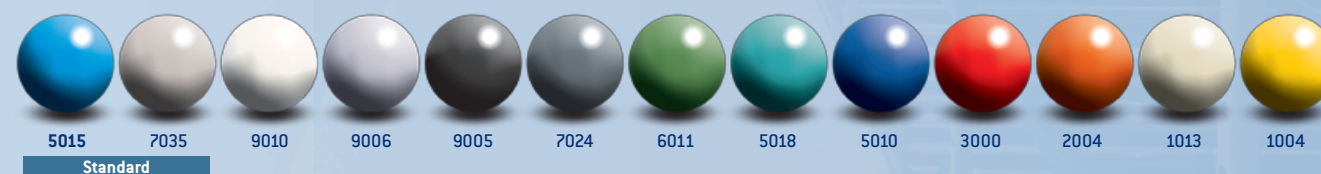

A KNOW-HOW AND PERFORMING MEANS AT YOUR DISPOSAL

The FLIP industrial wall



Secured

Stable

Good-looking

Adaptable

www.tosfield.be



The FLIP industrial wall



Secures the dangerous and working areas.
For a security without any compromise !

4 panels types

Made of standard panels assembled so that they cannot be removed from the outside.
Epoxy finish: standard RAL7035 grey

- Mesh panel (50x50x3,5 mm) **1**
- Steel panel (0,8 mm steel sheet) **2**
- Plexiglass panel (4 mm – transparent) **3**
- Steel/mesh panel (0,8 mm steel sheet and mesh 50x50x3,5 mm)
- White melaminated panel 19 mm.

LENGTHS (in mm)	HEIGHTS (in mm)
150 - 750 - 1000 - 1200 - 1500	2200 - 2400 - 3000

2 uprights types

With welded footplates and fixing material.
Epoxy finish: standard RAL5015 blue.

- Upright with footplate for floor fixing **4**
- Corner upright

HEIGHTS (in mm)
2200 - 2400 - 3000

Upper « U » profile

For the top of the industrial wall (31x30x1,5 mm).
Epoxy finish: standard RAL5015 blue

LENGTHS (in mm)
3000

Stabilisator with footplate **7**

To be installed behind the panels for more stability.
1 every 4 uprights.

Epoxy finish : standard RAL5015 blue.

LENGTHS (in mm)
1750

Wall fixing **8**

« U » profile 31x30x1,5 mm.
Epoxy finish: standard RAL5015 blue.

HAUTEURS (mm)
2200 - 2400 - 3000

Leaf or sliding doors

Panels: mesh, steel or mesh/steel.
With a strong frame.
Epoxy finish: standard RAL7035 grey.

- **Leaf door **9**** (with keys)
Pulling or pushing, left or right closing.
With upper brace for more stability.



LENGTHS (in mm)	HEIGHTS (in mm)
1000 - 1200 - 1500	2200 - 3000

- **Sliding door **10**** (with keys)
Left or right closing.



LENGTHS (in mm)	HEIGHTS (in mm)
1000 - 1200 - 1500 - 2000 2400 - 3000	2200 - 3000

With one or 2 panels.

- **Special doors**
 - Leaf door - 2000 mm high (mesh or steel)
 - Steel door with anti-panic lock 2200 mm high x 1200 mm wide
 - Mesh leaf door with padlock 2200 mm high x 1000 mm wide



Mesh hatch **11**

Padlock With removable inside shelf.
Epoxy finish: standard RAL7035.
Grey Mesh or steel bottom panel.

LENGTHS (in mm)	HEIGHTS (in mm)
1000 - (940 utile)	1000 - (960 utile)

Other accessories:

- Tubes for wall extremity and for cut panels
- Connectors for ceiling fixing
- Top panels for industrial walls higher than the door height
- Mesh roof
- Closing systems: padlocks, anti-panic lock, digicode system.



Possibility to adapt a switch.

Well designed

- « U » profiled uprights with good-looking fixing system
- Mix the different panels in order to create your industrial wall.

Good looking

- Profiled uprights
- No extra profile between upright and footplate for better connection between the floor and the panels
- Wires of the mesh panel are welded and pressed on the frame.



Stability and security

- Stable thanks to its uprights with footplates
- The panels cannot be removed from the outside.

Modular

- Panels can be mixed and height of the wall can be adjusted
- Lock with double side handle and european cylinder with 4 keys. Other closing systems available.

